

CILINDROS ESTÁNDAR SIMPLE EFECTO [600]

Single acting standard cylinders [600] / Vérins standard simple effet [600]
Einfachwirkende Standard Hydraulikzylinder [600]


01

SERIE 600 / SERIES 600 / SÉRIE 600 / SERIE 600

REF.	ØA	CARRERA STROKE COURSE HUB Z	E	C	D	G	H	J	O	P	L	M BSP	VOL (L)	JUNTAS SEALS JOINTS DICHTUNG	PESO WEIGHT POIDS GEWICHT (kg)
625/10	25	100	190	14	14,2	40	24	40			9,5	1/4	0,08	J625	1,5
625/20	25	200	290	14	14,2	40	24	40			9,5	1/4	0,16	J625	2,3
625/30	25	300	390	14	14,2	40	24	40			9,5	1/4	0,24	J625	3
630/2	30	200	300	17	16,2	50	26	42			15	3/8	0,25	J630	3,6
630/3	30	300	400	17	16,2	50	26	42			15	3/8	0,38	J630	4,7
630/4	30	400	500	17	16,2	50	26	42			15	3/8	0,5	J630	6
630/5	30	550	650	17	16,2	50	26	42			15	3/8	0,69	J630	7,6
630/7	30	700	800	17	16,2	50	26	42			15	3/8	0,88	J630	9,4
635/2	35	200	330	20	20,25	55	32	47			15	3/8	0,32	J635	4,7
635/3	35	300	430	20	20,25	55	32	47			15	3/8	0,48	J635	6,1
635/4	35	400	530	20	20,25	55	32	47			15	3/8	0,64	J635	7,5
635/5	35	550	680	20	20,25	55	32	47			15	3/8	0,87	J635	9,6
635/7	35	700	830	20	20,25	55	32	47			15	3/8	1,11	J635	11,7
640/2	40	200	330	22	23	60	32	47			15	3/8	0,39	J640	6
640/3	40	300	430	22	23	60	32	47			15	3/8	0,59	J640	7,6
640/4	40	400	530	22	23	60	32	47			15	3/8	0,79	J640	9,3
640/5	40	550	680	22	23	60	32	47			15	3/8	1,08	J640	11,7
640/7	40	700	830	22	23	60	32	47			15	3/8	1,37	J640	14,2
645/2	45	200	330	22	23	60	34	47	70	77	15	3/8	0,39	J645	7
645/3	45	300	430	22	23	60	34	47	70	77	15	3/8	0,59	J645	8,9
645/4	45	400	530	22	23	60	34	47	70	77	15	3/8	0,79	J645	10,9
645/5	45	550	680	22	23	60	34	47	70	77	15	3/8	1,08	J645	13,7
645/7	45	700	830	22	23	60	34	47	70	77	15	3/8	1,37	J645	16,7
650/2	50	200	360	25	25,25	65	49	50	75	80	15	3/8	0,48	J650	8,9
650/3	50	300	460	25	25,25	65	49	50	75	80	15	3/8	0,71	J650	11,2
650/4	50	400	560	25	25,25	65	49	50	75	80	15	3/8	0,95	J650	13,5
650/5	50	550	710	25	25,25	65	49	50	75	80	15	3/8	1,31	J650	16,8
650/7	50	700	860	25	25,25	65	49	50	75	80	15	3/8	1,66	J650	20,4
655/3	55	300	460	25	25,25	70	41	50	85	95	15	3/8	0,85	J655	13,6
655/5	55	550	710	25	25,25	70	41	50	85	95	15	3/8	1,56	J655	20,1
655/7	55	700	860	25	25,25	70	41	50	85	95	15	3/8	1,98	J655	24,2
660/2	60	200	360	25	25,25	75	36	50	90	95	15	3/8	0,66	J660	12,6
660/3	60	300	460	25	25,25	75	36	50	90	95	15	3/8	1	J660	15,7
660/4	60	400	560	25	25,25	75	36	50	90	95	15	3/8	1,33	J660	18,7
660/5	60	550	710	25	25,25	75	36	50	90	95	15	3/8	1,83	J660	23,3
660/7	60	700	860	25	25,25	75	36	50	90	95	15	3/8	2,32	J660	28,4
670/3	70	300	495	28	30,5	90	50	58	108	110	17	1/2	1,33	J670	25,1
670/4	70	400	595	28	30,5	90	50	58	108	110	17	1/2	1,77	J670	29,6
670/5	70	550	745	28	30,5	90	50	58	108	110	17	1/2	2,43	J670	36,5
670/7	70	700	895	28	30,5	90	50	58	108	110	17	1/2	3,09	J670	43,4


DISEÑO PARA CILINDROS ØA DE 25 A 40 / DESIGN FOR CYLINDERS ØA FROM 25 TO 40

CONCEPTION VÉRINS ØA DE 25 À 40 / AUSFÜHRUNG FÜR ZYLINDER ØA VON 25 BIS 40

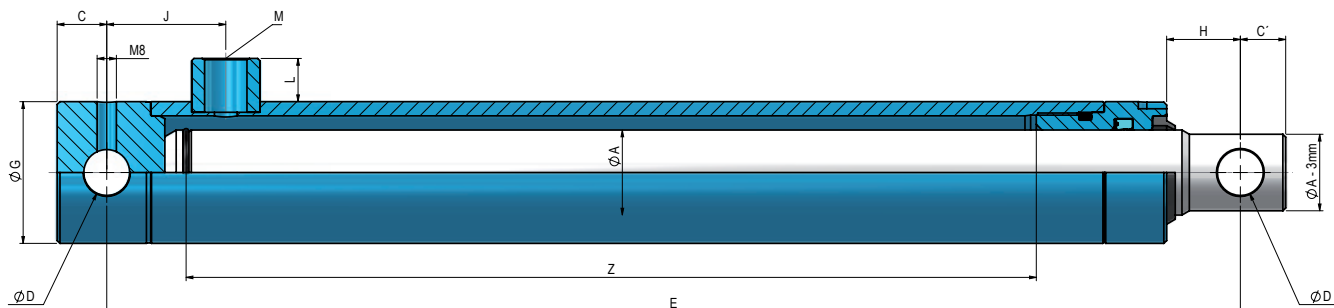


DISEÑO PARA CILINDROS ØA DE 45 A 70 / DESIGN FOR CYLINDERS ØA FROM 45 TO 70

CONCEPTION VÉRINS ØA DE 45 À 70 / AUSFÜHRUNG FÜR ZYLINDER ØA VON 45 BIS 70

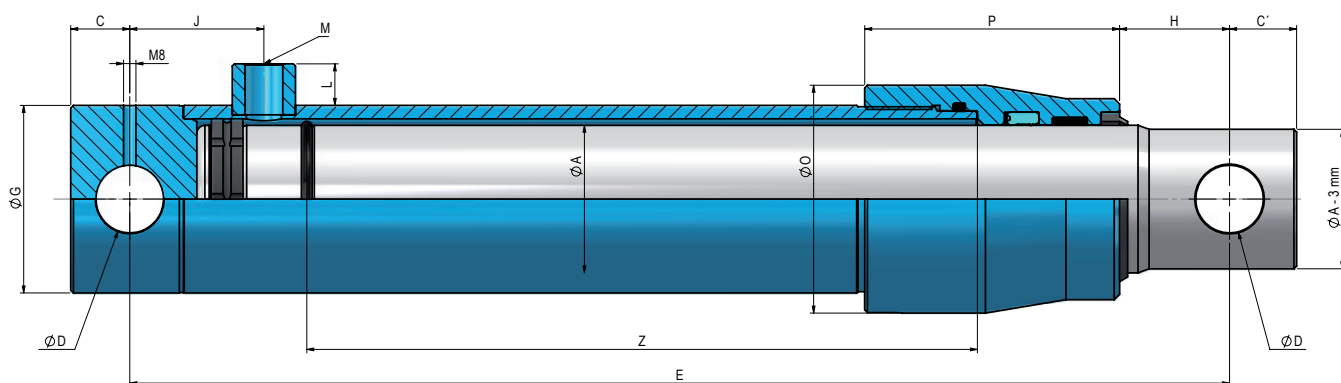

Pandeo / Buckling / Flambage / Knicken

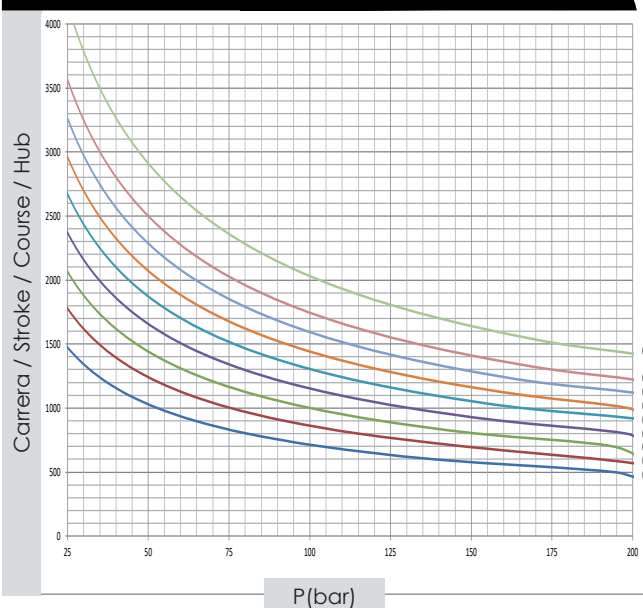

Fuerza de empuje / Upward thrust / Force de poussée / Schubkraft

